


SUGGESTED AMPACITY FOR WELDING CABLE DISTANCE MEASURED IN FEET*

Amps	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'
100	#4	#2	#2	#1	#1	1/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0
150	#2	#2	#1	1/0	2/0	3/0	3/0	4/0	4/0				
200	#2	#1	2/0	3/0	3/0	4/0	4/0						
250	#1	1/0	3/0	4/0	4/0								
300	#1	2/0	3/0	4/0									
350	1/0	3/0	4/0										
400	2/0	3/0											
450	2/0	4/0											
500	3/0	4/0											
550	4/0												
600	4/0												

This table is for reference only. There are variables in welding applications, therefore it is recommended the user consult an electrical engineer for a particular welding application.

*Distance from power source (per lead).

CABLE SIZES - DRAWN TO SCALE

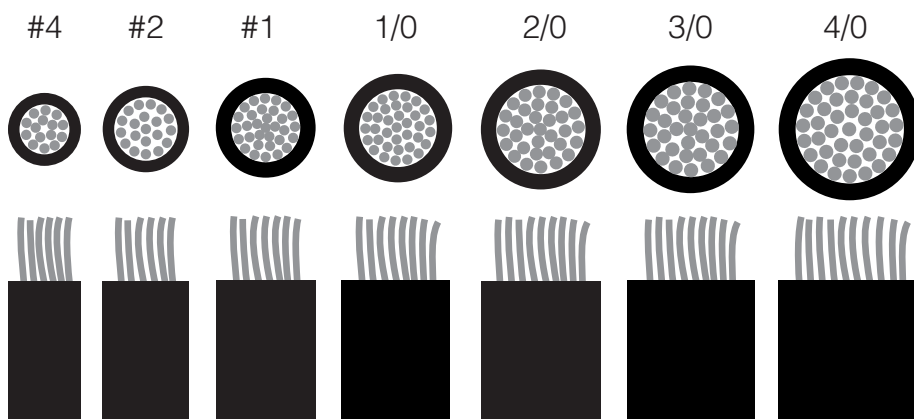

Make sure you're ordering the right cable for the right job.

Contact the experts. We'll get you what you need when you need it.

1-800-233-3848
www.directwireusa.com